

Performance PS 130



2-way kit

- Processed Aluminum inverted dome tweeter
Smoothness and definition without directivity
- Chrome magnet
Nice look

- Polyglass cone
Neutral sound without coloration

- Aluminum chassis
Rigid and non-magnetic
- Phase plug
Better dispersion

- Partial horn loading
Best positioning of the soundstage

- Butyl surround
Excellent reliability

- Separable crossover
Easy integration

- Tilted mounting
Easier installation



ADVANTAGES

- Partial horn loading tweeter
- High sensitivity
- Dynamics and neutrality
- Three tweeter cut-off frequencies
- Three tweeter integration possibilities

TECHNICAL CHARACTERISTICS

Diameter: 5" (130mm)
Voice-coil diameter: 1" (25mm)
Voice-coil height: 0^{2/16"} (11mm)
Magnet: 3^{1/3"} (85mm)


Processed Aluminum inverted dome tweeter
Integrated crossover: 6/6dB/oct
Max. power: 120 watts
Nom. power: 60 watts rms

Sensitivity (2.83V/1m): 91.4dB
Frequency response: 80Hz – 20kHz
Accessories: Supplied grilles

Performance PS 165



2-way kit

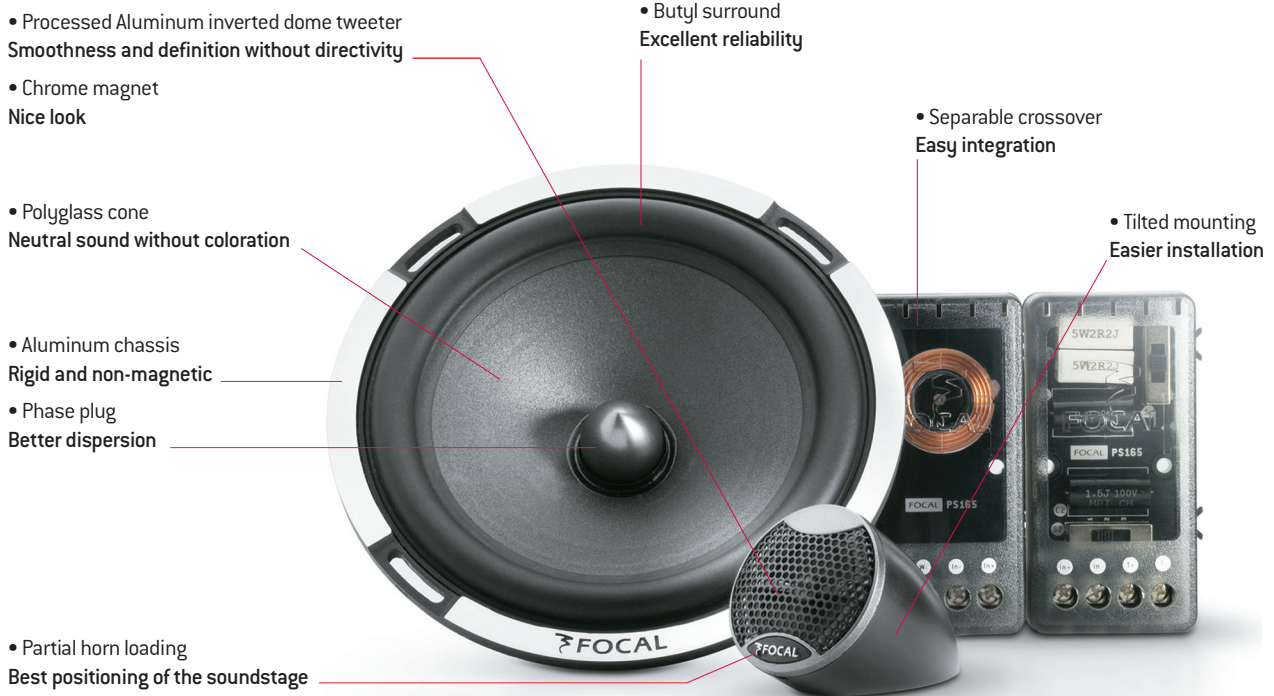

ADVANTAGES

- Partial horn loading tweeter
- High sensitivity
- Dynamics and neutrality
- Adjustable tweeter levels
- Three tweeter cut-off frequencies
- Three tweeter integration possibilities

TECHNICAL CHARACTERISTICS

Diameter: 6^{1/2"} (165mm)
Voice-coil diameter: 1" (25mm)
Voice-coil height: 0^{7/16"} (11.5mm)
Magnet: 3^{1/3"} (85mm)

Processed Aluminum inverted dome tweeter
Integrated crossover: 6/6dB/oct
Max. power: 120 Watts
Nom. power: 60 Watts rms

Sensitivity (2.83V/1m): 92.5dB
Frequency response: 60Hz – 20kHz
Accessories: Supplied grilles